


turbo[®] Flex-n-Line Warranty

Maradyne Corporation warrants the **turbo[®] Flex-n-Line** Precleaner to be of adequate material and good workmanship to satisfactorily perform all functions which are defined and limited by the Maradyne product specifications.

The Company's obligation under this warranty are limited to repair/replacement without charge for units which the company determines to be defective. The time limitations for such repair/replacement will be within (2) Two Years from the date of purchase.

Maradyne Corp will not assume transportation or other charges (VAT, taxes, brokerage fees, duties, etc) involved in such repair/replacement. This Warranty does not cover units damaged by abuse, neglect or misuse.

PRECLEANER INSTALLATION INSTRUCTIONS

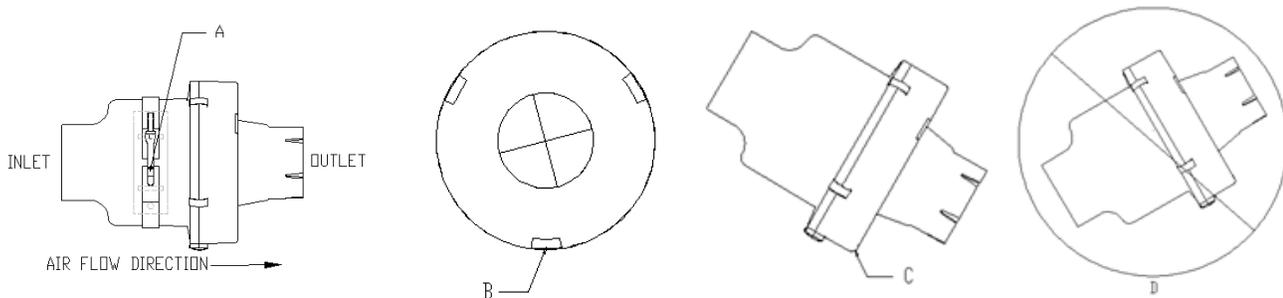

- A. Optional mounting bracket
- B. Exhaust port must face down for horizontal installation
- C. Exhaust port at lowest point for angled installation
- D. Do NOT mount at less than horizontal
- E. When placing the precleaner on the air intake pipe, make sure it is set all the way down so the slots in the base are completely covered by the intake pipe.
- F. Tighten the clamp securely.

Your **turbo III[®]** Precleaner is now ready for operation.

Although the **turbo III[®]** Flex-n-Line requires no periodic maintenance, it should be checked occasionally to make sure that foreign materials have not plugged the exhaust ports of the unit.

NOTE: Since dry type filters and oil bath type filters are quite different in regards to the allowable amount of air intake restriction, we recommend that a vacuum gauge be used to ensure that a turbo[®] Precleaner does not cause excessive restriction (at top engine R.P.M.) when installed on an oil bath type filter.

turbo[®] Precleaner

Maradyne Corporation

4540 West 160th St.

Cleveland, Ohio USA 44135-2629

Email@turboprecleaner.com

Phone: 216-362-0755

Fax: 216-362-0799

www.turboprecleaner.com